



Epsilon Lambda Electronics


Since 1974

**Celebrating 36 Years as the Millimeter Wave Industry
Technology Leader**

VEHICLE DETECTION SENSOR FOR INTERSECTION SAFETY ENHANCEMENT

Multiple Vehicle Tracking – Range, Lane and Speed

Radar Sensor for Traffic Management, Collision Reduction and to Enable Law
Enforcement

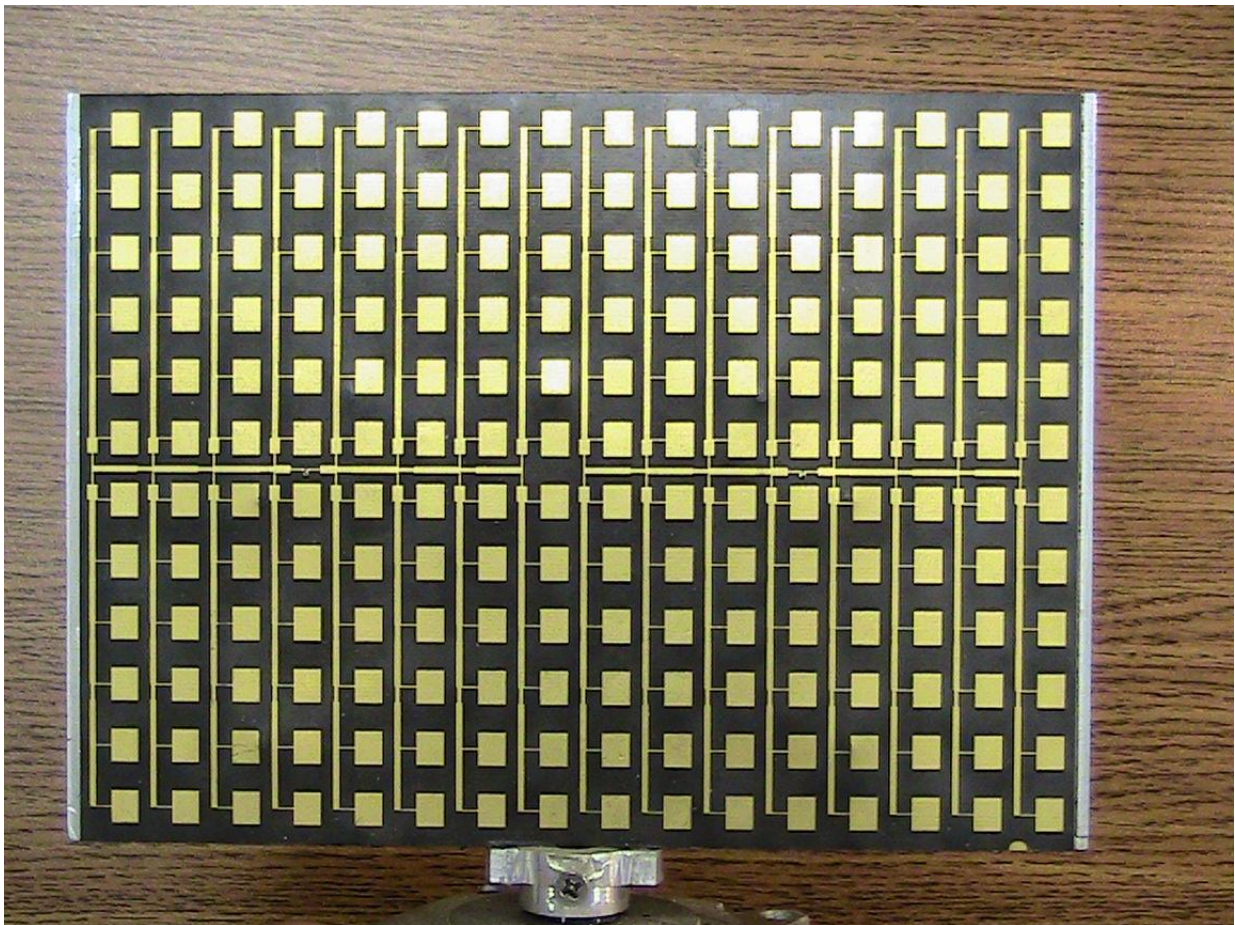

Epsilon Lambda Electronics

396 Fenton Lane Suite 601 *West Chicago IL 60185 * 630 239 7118 * 630 293 5809 fax

FEATURES

- FM-CW Ranging Radar – Millimeter Wavelength (High Resolution)
- High Gain Antenna with range up to 150 meter (10 dB RCS)
- Azimuth Object Angle Determination without mechanical scan
- Low Phase Noise Transceiver
- Operable from Battery Supply Voltages
- Compact Size, Rugged Construction
- Code embedded to DSP Circuit Card
- F.O.V. Image maps displayed on Laptop

This low cost, high resolution 2D radar vehicle detection sensor is suitable as infrastructure for intersection safety enhancement or for traffic detection, classification and management. Object data reported includes range; azimuth angle, relative velocity, and signal return amplitude.

Model ELSO22-2A Specifications

Transmitter Power	+10 dBm
Center Frequency	24.125 ± 0.05 GHz
Number of Obstacles in Image Map	16 in beam width
Temperature Range	-20 to +85 degree C
Antenna Gain	>27 dB
Azimuth FOV	Fixed by antenna beam angle
Azimuth Beam Angle	7 degree
Azimuth Angle Accuracy	1.0 degree by monopulse processor
Elevation Beam Angle (and FOV)	5.0 degree
Polarization	Linear
Maximum Operating Range (Rmax*)	150 meters (10 dB RCS)
Obstacle List Update Rate (Ts*)	0.2 s
Typical Range Resolution (dR*)	0.5 meter
DC Power (Electronics)	9-16 V / max 1.5 A
Weight	3.5 Kg
DSP Board	Supplied
I/O Connection	USB to Laptop computer for map display

- Please contact Epsilon Lambda Electronics sales department for further information regarding this innovative radar sensor product.

bobk@epsilonlambda.com